



## Main Features

- Support 35W 10th Gen Intel® Core™ i9/i7/i5/i3/Pentium/Celeron processor (Comet Lake-S)
- Stylish slim bezel, metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap touch with zero bezel flush front design
- 2 X DDR4 2933MHz memory, up to 64GB (non-ECC)
- Dual Intel® GbE LAN ports/DP++/dual USB 3.0
- 1 x RS232, 1 x RS232/422/485 with isolation (optional)
- Internal support :
  - 1 x mini-PCIe (PCIe x1, USB 2.0, SATA)
  - 1 x M.2 3042/3052 Key B (PCIe x1, USB 3.0, USB 2.0)
  - 1 x M.2 2242 Key B (PCIe x1, USB 2.0, SATA)
- 24VDC input; support AT/ATX power mode
- 1 x PCIe x4 expansion

## Product Overview

The new 23.8" fanless panel PC IPPC 2411-C11 is equipped with a high-performance 10th Gen Intel® Core™ i9/i7/i5/i3 socket-type CPU platform, intended for versatile industrial applications. IPPC 2411-C11 has a narrow border touch screen and a LED backlight LCD panel with 1366 x 768 (HD) resolution. The front panel which adopts a flush, narrow border design and complies with the IP66 standard to make it perfectly fit in industrial applications.

IPPC 2411-C11 contains dual Gigabit Ethernet connectors, one mini-PCIe slot, and an M.2 slot to support multiple networks of LAN/WLAN/WWAN (5G). In addition, it can hook a 2nd display via DP++ for dual independent display, one adjustable RS232/422/485 port with isolation, and provides a PCIe x4 for add-on card expansion.

## Specifications

### Panel

- LCD size: 23.8", 16:9
- LCD interface: LVDS
- Resolution: FHD 1920 x 1080
- Luminance: 350cd/m<sup>2</sup>
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

### Touch

- Ten points P-Cap (projected capacitive touch)
- Light transmission: 87%
- Interface: USB
- Anti-scratch surface: 7H hardness

### System

- CPU (optional): support 10th Gen Intel® Core™ i processor family, LGA 1200 socket type, max 35W.
  - 10th Gen Intel® Core™ i9-10900TE (20M Cache 2.0GHz up to 4.5GHz)
  - 10th Gen Intel® Core™ i7-10700TE (16M Cache 2.0GHz up to 4.4GHz)
  - 10th Gen Intel® Core™ i5-10500TE (12M Cache 2.3GHz up to 3.7GHz)
  - 10th Gen Intel® Core™ i3-10300TE (8M Cache 2.3GHz up to 3.6GHz)
  - 10th Gen Intel® Pentium® G6400TE (4M Cache 3.2GHz)
  - 10th Gen Intel® Celeron® G5900TE (4M Cache 3.0GHz)

- BIOS: AMI BIOS
- Intel® PPT (fTPM) support; TPM IC (optional)
- System chipset: Intel® H420E PCH
- System memory (optional): 2 x 260-pin DDR4 SO-DIMM socket, support up to max 32GB DDR4 2933MHz (non-ECC)
- Storage device:
  - 1 x M.2 2242 Key B
  - 1 x mini-PCIe
  - 1 x Hard drive tray

### Rear I/O


- 2 x DB9 for COM1&COM2
  - COM1: RS232
  - COM2: RS232/422/485 auto flow control (isolation)
- 2 x USB 3.1 ports (900mA per each)
- 1 x DP++
- 2 x Intel® I210-IT GbE LAN ports; support WoL, teaming and PXE
- 1 x 2-pin remote power on/off switch
- 24V DC input

### Expansion Slot

- One PCIe x4 expansion slot: FHFL, 40W max
- 1 x mini-PCIe for Wi-Fi/mSATA
- 1 x M.2 3042/3052 Key B for 5G/Wi-Fi
- 1 x Nano SIM card onboard



## Dimension Drawing

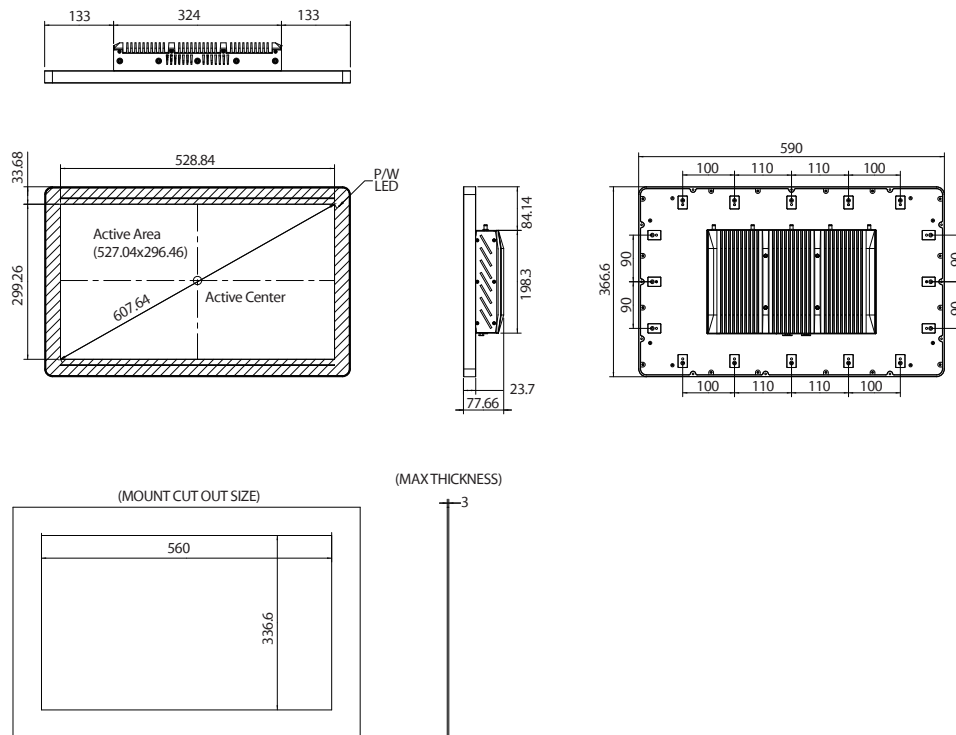

### Power Requirements

- ♦ AT/ATX power mode (default: ATX power mode)
- ♦ Power input: +24V DC
- ♦ Power adapter: optional AC to DC power adapter (24V DC, 120W)

### Dimensions

- ♦ 366.6 mm(W) x 590mm (D) x 74.2mm (H)

### Construction

- ♦ Aluminum and metal chassis with fanless design

### Environment

- ♦ Operating temperature:
  - Ambient with air flow: 0°C to 50°C
  - Storage temperature: -20°C to 75°C
- ♦ Relative humidity: 10% to 90% (non-condensing)
- ♦ Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-27
  - M.2: 50G, half sine, 11ms, IEC60068-2-27
- ♦ Vibration protection with SSD&M.2 condition: (TBD)
  - Random: 2Grms@5~500 Hz, IEC60068-2-64
  - Sinusoidal: 2Grms@5~500 Hz, IEC60068-2-6

### Certifications

- ♦ CE approval- EN61000-6-2- EN61000-6-4
- ♦ FCC Class A

### OS Support

- ♦ Windows 10 64-bit
- ♦ Windows 11 64-bit

### Weight Information

- ♦ 10 kg

## Ordering Information

### Barebone

- ♦ **IPPC 2411-C11 (P/N: 10II0241100X0)**  
23.8" TFT HD 16:9 heavy industrial panel PC 10th Gen Intel® Core™ i processor support, P-Cap screen, DDR4, PCIe slot supported

### Others

- ♦ **24V, 60W AC/DC power adapter w/o power cord (P/N: 7400060061X00)**
- ♦ **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120029X00)**