


nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782

How to install Wi-Fi card and Antenna on nDAS

1. Open nDAS package and take out Wi-Fi card and antenna in the bottom.

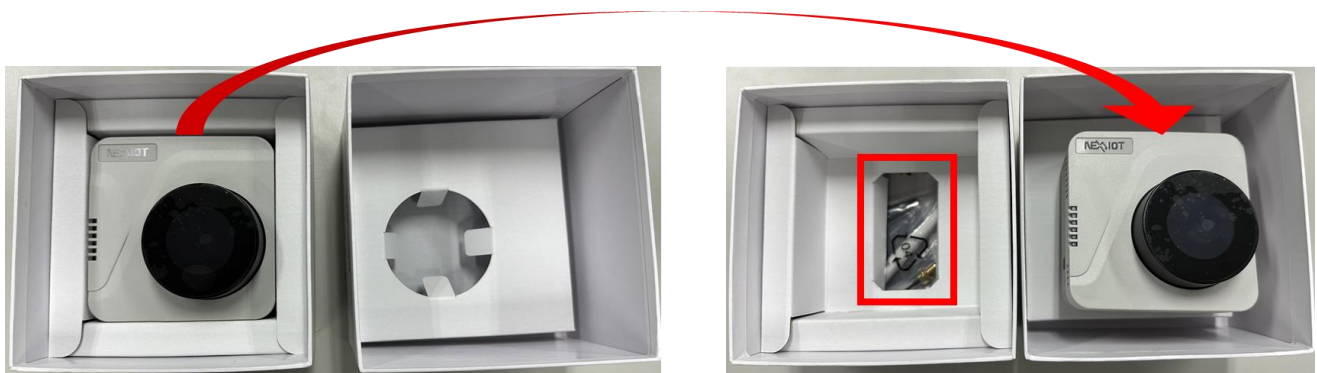

nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782



2. Check the assemblies in the pack. It should include:


- a. Antenna * 1
- b. Cross screw * 1
- c. Wi-Fi card * 1
- d. Antenna signal cable * 1




nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782

- Unscrew the 4 cross screws at the back of nDAS. Then open nDAS.

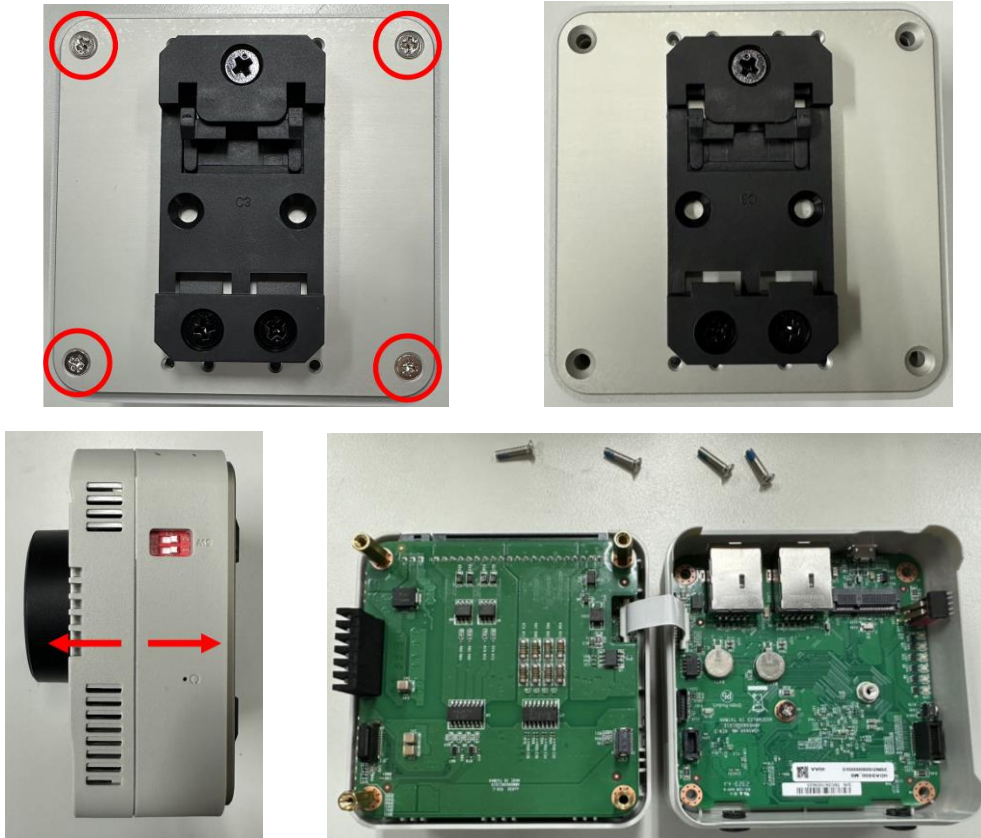


- Take out Wi-Fi card(c) and insert it on the M.2 slot. Then screw the cross screw(b) to fix the Wi-Fi card.

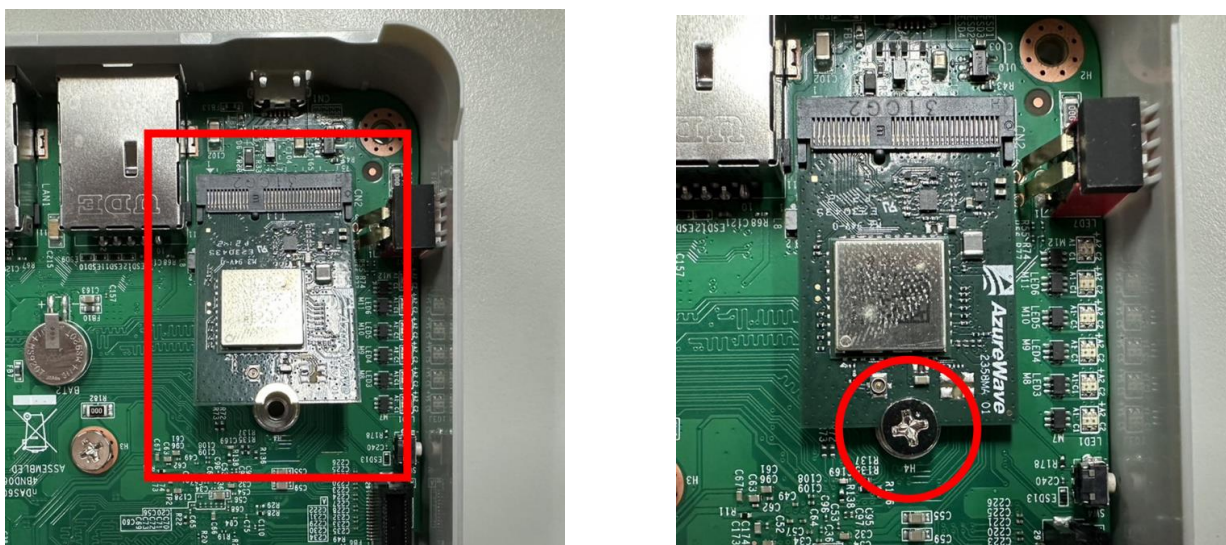


nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782

5. Remove the rubber stopper near the Wi-Fi card on the top of nDAS.

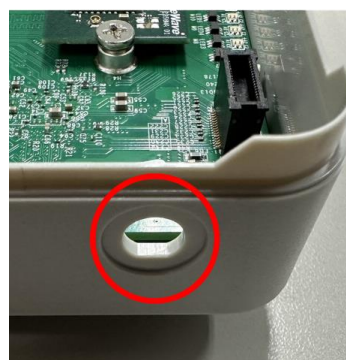



6. Take the antenna signal cable(d) and unscrew the nut. Get the nut and ring.

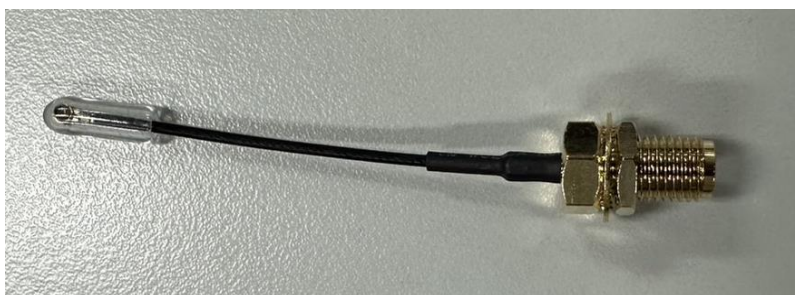

nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782


7. Insert the antenna connector to the antenna hole. There is fool-proof design on the connector and the hole. There is a side is flat on the connector and the hole.

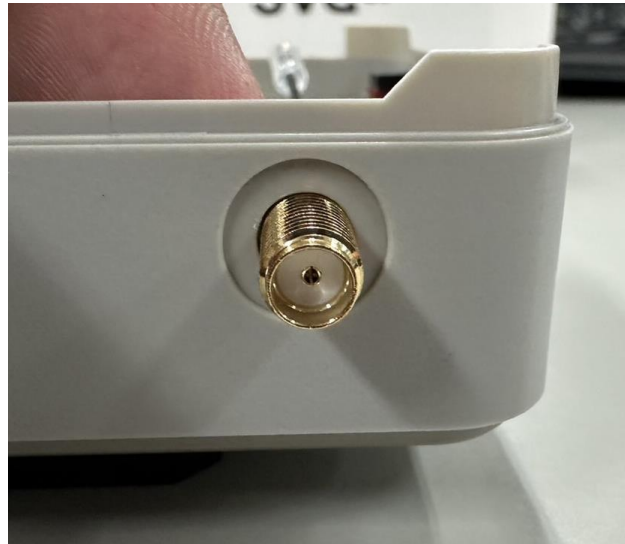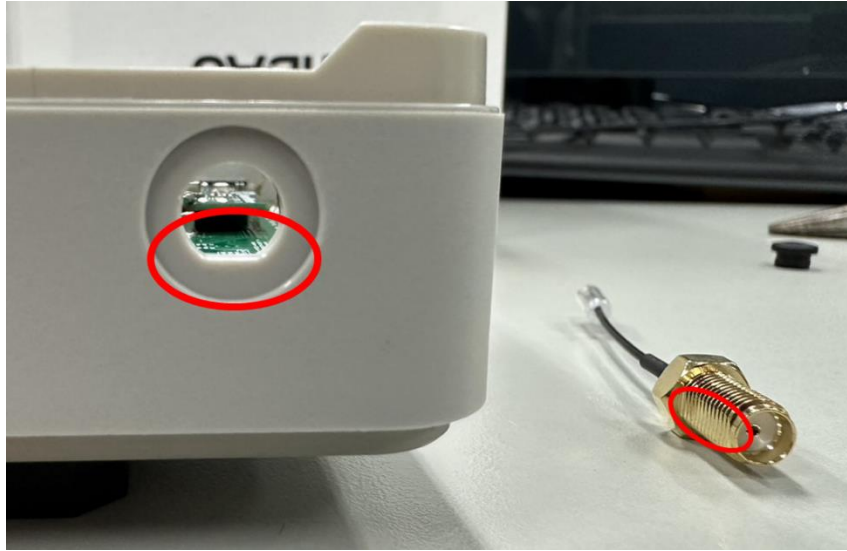

nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782



8. Put the ring in the connector first. Then screw the nut to fix the antenna connector.

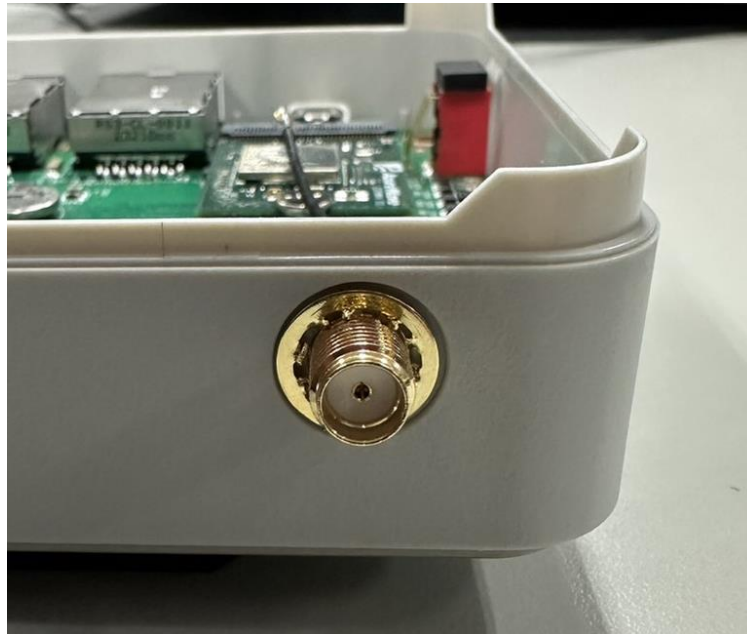

nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782



9. Remove the casing on the mini-IPEX connector. Then plug it in the connector on Wi-Fi card. If it is possible, take a tape and slap it on the connector and the screw.

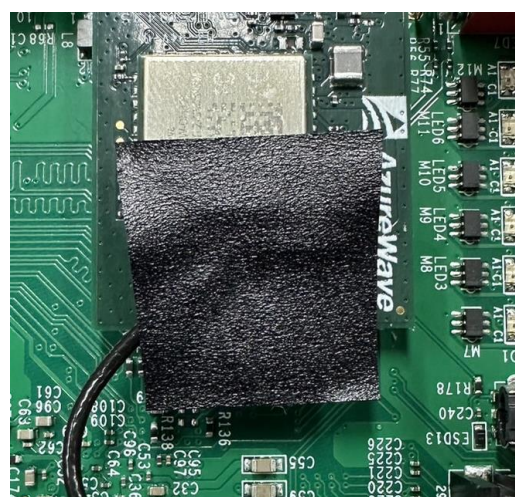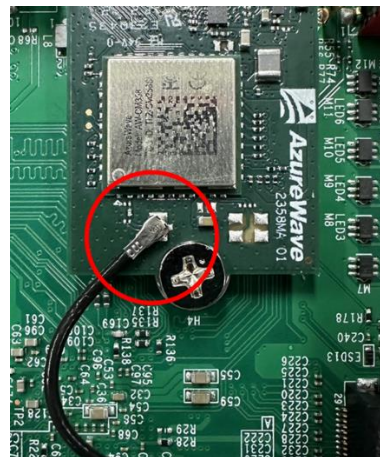

nexaiot Co., Ltd.

13F, No.922, Chung-Cheng Rd.,
Chung-Ho Dist., New Taipei City,
Tel: +886 2 8226 7786
Fax: +886 2 8226 7782

10. Close nDAS and screw 4 cross screws at the back of nDAS.

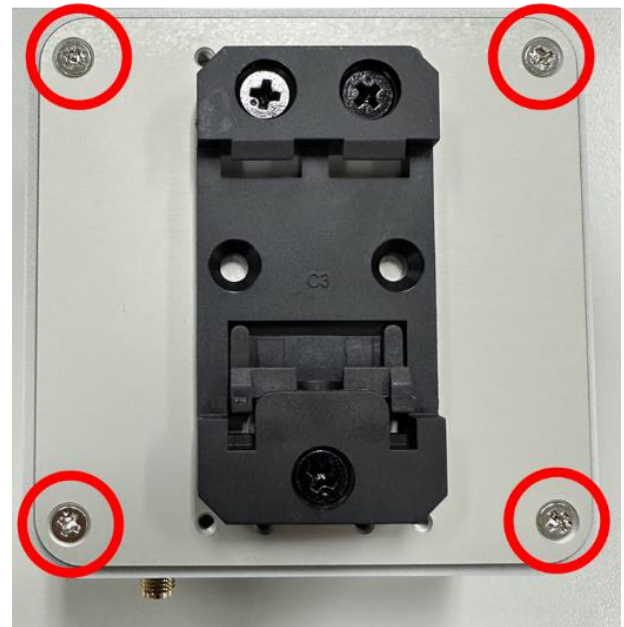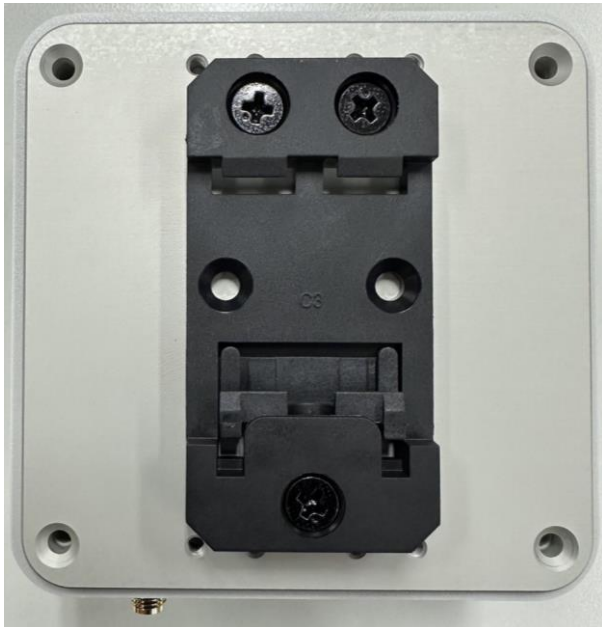

11. Tighten the antenna(a) on the connector.

The installation of Wi-Fi card and antenna is completed.

